

## *Data Sheet*

Customer: \_\_\_\_\_

Product: Aluminum Electrolytic Capacitors – AELP Series

AEC-Q200 version available

Size : 22x25mm ~ 40x70mm \_\_\_\_\_

Issued Date: 16-Oct-2023 \_\_\_\_\_

Edition: Ver. 1 \_\_\_\_\_

### Record of change

Date	Ver.	Description	Page
16-Oct-2023	1		

### **HITANO ENTERPRISE CORP.**

7F-7, No. 3, Wu Chuan 1<sup>st</sup> Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969


Prepared by	Checked by	Approved by	Accepted by (customer)
16-Oct-2023	16-Oct-2023	16-Oct-2023	
<i>Hwa Wu</i>	<i>Andy Hsu</i>	<i>Arthur Su</i>	

- Directly mountable on printed circuit board without holders.
- Smaller low profile sizes than ordinary capacitors.
- Terminal spacing fixed at 10mm for PC board plug in.
- Aluminum case designed explosion-proof vent.
- AEC-Q200 version available

**Characteristics**

<b>Voltage Range</b>	10 ~ 100V		160 ~ 450V				
<b>Capacitance Range</b>	470 ~ 68000uF		47 ~ 2700uF				
<b>Temperature Range</b>	-40 ~ +85°C		-25 ~ +85°C				
<b>Capacitance Tolerance</b>	±20% at 120Hz, 20°C( 10% Tol. is available upon request)						
<b>Leakage Current</b>	$I = 3\sqrt{CV}$ (uA) max C: Capacitance, V:W.V. (After 5 minutes)						
<b>Dissipation Factor(tanδ) ( at 20°C, 120Hz)</b>	Less than the value under table (%)						
	uF \\\ W.V.	10 ~ 16	25 ~ 35	50 ~ 63	80 ~ 100	160 ~ 250	350 ~ 450
	47 ~ 390	-	-	-	-	15	20
	470 ~ 3900	25	20	20	20	15	20
	4700 ~ 8200	35	30	30	25		
	10000 ~ 22000	40	35	30	30		
	27000 ~ 47000	45	40	35			
<b>Low Temperature Characteristics (at 120Hz)</b>	Impedance ratio at 120Hz between the -25°C or -40°C value and 20°C value shall not exceed :						
	Rated Voltage	10 ~ 16	25	35 ~ 63	100	160 ~ 250	400 ~ 450
	Z-25°C/Z 20°C	5	4	4	4	4	8
	Z-40°C/Z 20°C	15	15	12	12	-	-
<b>Load Life</b>	Following specifications shall meet when the capacitors are restored to 20°C after rated working voltage applied for 2,000 hours at max. operating temperature with the rated ripple current applied.						
	Capacitance change	≤ ±20% of the initial value.					
	Dissipation factor	≤ ±200% of the initial specified value					
	Leakage current	≤ The initial specified value.					
<b>Shelf Life</b>	After storage for 1000 hours at 85°C with no voltage applied, the capacitor shall meet the specified limit in load life. Pre-treatment for measurement shall be conducted after application of DC working voltage for 30 minutes.						

**Diagram of dimensions**

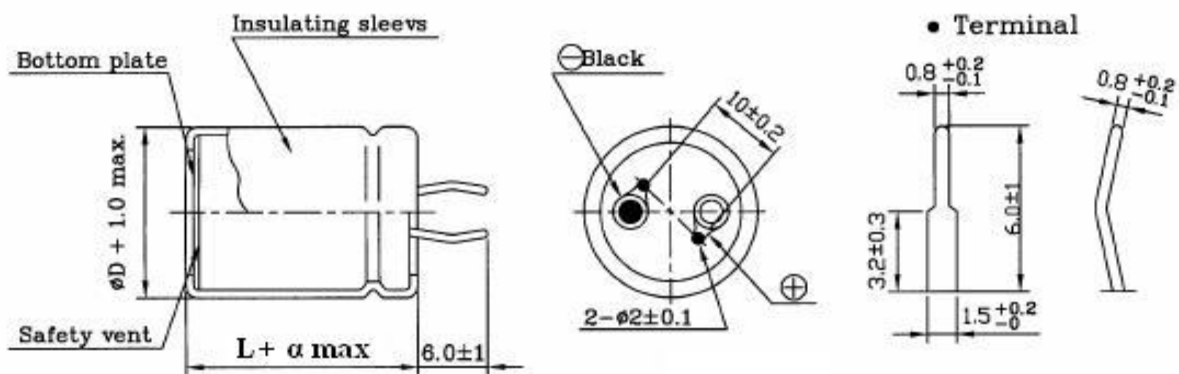

**Multiplier for Ripple Current vs Frequency**

Cap.(uF) \\\ (Hz)	60	120	1K	10K	50K - 100K
10 < Cap. ≤ 100	0.8	1	1.36	1.48	1.53
100 < Cap. ≤ 1000	0.8	1	1.25	1.35	1.38
1000 < Cap.	0.8	1	1.17	1.25	1.28

(mm)

Dia	22 ~ 25	30 ~ 40
$\alpha$	2	3





**Standard Products Table**

W.V. Dimension Cap. (uF)	400								450							
	A		B		C		D		A		B		C		D	
	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC	Size	RC
47	22x25	0.42								22x25	0.36					
68	22x25	0.51								22x25	0.50					
82	22x25	0.83								22x30	0.89	25x25	0.89			
100	22x30	1.03	25x25	1.03						22x35	1.03	25x30	1.03			
120	22x30	1.07	25x25	1.07						22x40	1.19	25x35	1.19			
150	22x40	1.26	25x30	1.26	30x25	1.26	22x35	1.26	22x45	1.39	25x35	1.39	30x30	1.39		
180	22x40	1.46	25x35	1.46	30x25	1.46			22x50	1.52	25x45	1.52	30x35	1.52		
220	22x45	1.75	25x40	1.75	30x30	1.75			25x50	1.76	30x40	1.76	30x30	1.68	35x35	1.76
270	25x45	1.96	30x35	1.96	30x30	1.96			30x45	2.00	35x35	2.00				
330	30x40	2.26	35x35	2.26	25x50	2.26			30x45	2.29	35x40	2.29	35x35	2.29	30x40	2.29
390	30x45	2.50	35x40	2.26					30x45	2.54	35x40	2.54	40x35	2.54		
470	30x50	2.66	35x40	2.67	35x45	2.80	40x35	2.80	35x45	2.89	40x40	2.89	35x40	2.76		
560	35x40	2.89	35x45	3.03					30x50	2.76						
680	40x50	3.69	35x50	3.41					35x60	3.52	40x50	3.14				
820	35x60	3.80	40x50	3.23					35x70	3.86	40x60	4.00				
1000	35x65	3.80	40x60	3.75							40x70	4.6				
1200	35x80	4.50	40x70	4.68					35x80	5.51	40x80	5.42				
1500			40x80	4.23					40x100							

Ripple Current (A, rms) at 85°C 120Hz

**Part Numbering Designation**

<b>AELP</b>	<b>101</b>	<b>M</b>	<b>2G</b>	<b>B</b>	<b>A</b>
SERIES	CAPACITANCE	TOL.	W.V.	PACKAGE	SIZE
	IN 3DIGITS	M= ± 20%	10= 10V	B= Bulk	A= A Size
	101= 100uF	K= ± 10%	16= 16V		B= B Size
	102= 1000uF		25= 25V		C= C Size
	103= 10,000uF		35= 35V		D= D Size
			50= 50V		
			63= 63V		
			80= 80V		
			2A= 100V		
			2C= 160V		
			2D= 200V		
			2E= 250V		
			2V= 350V		
			2G= 400V		
			2W= 450V		