

Data Sheet

Customer: _____

Product: Ultra High Q / Low ESR Multilayer Ceramic Chip Capacitors _____

Size : 01005/0201/0402/0505/0603/0805/1111 _____

Issued Date: 28-Jun.-2024 _____

Edition: Ver. 3 _____

Record of change

Date	Ver.	Description	Page
29-Mar.-2023	2	Add Size/Dielectric/Capacitance/Rated Voltage	1 ~ 9
28-Jun.-2024	3	Add X8G Siza 0402&Delete SIZE 0201 100V	2,4,5
		Add CAPACITANCE RANGE(Con.)(X8G) SIZE &RARED VOLTAGE	9
		Add Dielectric Strength Test Condition (RF02:300% of rated voltage.)	14
		Revise Paper Tape & Add Constructions X8G	17,18

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,
New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
28-Jun.-2024	28-Jun.-2024	28-Jun.-2024	
Randy Yu	Michelle Lin	Arthur Su	

1. INTRODUCTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used.

Hitano RF series MLCC is used at high frequencies generally have a small temperature coefficient of capacitance, typical within the $\pm 30\text{ppm}/^\circ\text{C}$ required for NP0 (C0G) classification and have excellent conductivity internal electrode. Thus, our RF series MLCC will be with the feature of low ESR and high Q characteristics.

2. FEATURES

- High Q and low ESR performance at high frequency.
- Ultra low capacitance to 0.1pF.
- Can offer high precision tolerance to $\pm 0.05\text{pF}$.
- Quality improvement of telephone calls for low power loss and better performance.

3. APPLICATIONS

- Telecommunication products & equipments :
Mobile phone, WLAN, Base station.
- RF module : Power amplifier, VCO.
- Tuners.

4. HOW TO ORDER

<u>RF</u>	<u>0201</u>	<u>N</u>	<u>101</u>	<u>J</u>	<u>251</u>	<u>C</u>	<u>I</u>
<u>Series</u>	<u>Size</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated voltage</u>	<u>Termination</u>	<u>Packaging</u>
RF= Ultra High Q & Low ESR	01R5 = 01005 (0402) 0201 (0603) 0402 (1005) 0505 (1414) 0603 (1608) 0805 (2012) 1111 (2828)	N=NPO (C0G) G=X8G	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 0R5=0.5pF 1R0=1.0pF 100=10x10 ⁰ =10pF	A= $\pm 0.05\text{pF}$ B= $\pm 0.1\text{pF}$ C= $\pm 0.25\text{pF}$ D= $\pm 0.5\text{pF}$ F= $\pm 1\%$ G= $\pm 2\%$ J= $\pm 5\%$	Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3 =6.3 VDC 100 =10 VDC 160 =16 VDC 250 =25 VDC 500 =50 VDC 101 =100 VDC 201 =200 VDC 251 =250 VDC 501 =500 VDC 152 =1500 VDC	C=Cu/Ni/Sn	T= 7" reeled G= 13" reeled

5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Remark	M _B (mm)	
01005 (0402)	0.40 \pm 0.02	0.20 \pm 0.02	0.20 \pm 0.02	V	#	0.10 \pm 0.03
0201 (0603)	0.60 \pm 0.03	0.30 \pm 0.03	0.30 \pm 0.03	L	#	0.15 \pm 0.05
0402 (1005)	1.00 \pm 0.05	0.50 \pm 0.05	0.50 \pm 0.05	N	#	0.25+0.05/-0.10
0603 (1608)	1.60 \pm 0.10	0.80 \pm 0.10	0.80 \pm 0.07	S		0.40 \pm 0.15
	1.60 +0.15/-0.10	0.80 +0.15/-0.10	0.50 \pm 0.10	H		
0805 (2012)	2.00 \pm 0.15	1.25 \pm 0.10	0.60 \pm 0.10	A		0.50 \pm 0.20
	2.00 \pm 0.20	1.25 \pm 0.20	0.85 \pm 0.10	T		
0505 (1414)	1.40+0.38/-0.25	1.40 \pm 0.38	1.15 \pm 0.15	J	#	0.25+0.25/-0.13
1111 (2828)	2.79 +0.51/-0.25	2.79 \pm 0.38	≤ 1.78	G	#	0.38 \pm 0.25




Fig. 5.1 The outline of MLCC

Reflow soldering only is recommended.

6. GENERAL ELECTRICAL DATA

Dielectric	NPO	X8G
Size	01005, 0201, 0402, 0505, 0603, 0805, 1111	0402, 0603, 0805
Capacitance*	0.1pF to 1000pF	0.2pF~82pF
Capacitance tolerance	Cap≤5pF: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	
Rated voltage (WVDC)	6.3V, 10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 1500V	200V, 250V, 500V
Q*	01005, 0201, 0402/25V~50V: Cap<30pF:Q≥400+20C; Cap≥30pF:Q≥1000 0402/100V~200V, 0603, 0805, 0505, 1111: Cap<30pF:Q≥800+20C; Cap≥30pF:Q≥1400	
Insulation resistance at Ur	≥10GΩ or RxC≥100Ω-F whichever is smaller.	
Operating temperature	-55 to +125°C	-55 to +150°C
Capacitance change	±30ppm/°C	
Termination	Ni/Sn (lead-free termination)	

* Measured at the conditions of 25°C ambient temperature and 30~70% related humidity.

Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap.≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap.>1000pF.

7. CAPACITANCE RANGE

DIELECTRIC		NPO		
SIZE		01005		Tolerance
RATED VOLTAGE (VDC)		16	25	
Capacitance	0.2pF (0R2)	V	V	A, B
	0.3pF (0R3)	V	V	A, B
	0.4pF (0R4)	V	V	A, B
	0.5pF (0R5)	V	V	A, B, C
	0.6pF (0R6)	V	V	A, B, C
	0.7pF (0R7)	V	V	A, B, C
	0.75pF (R75)	V	V	A, B, C
	0.8pF (0R8)	V	V	A, B, C
	0.9pF (0R9)	V	V	A, B, C
	1.0pF (1R0)	V	V	A, B, C
	1.2pF (1R2)	V	V	A, B, C
	1.5pF (1R5)	V	V	A, B, C
	1.8pF (1R8)	V	V	A, B, C
	2.0pF (2R0)	V	V	A, B, C
	2.2pF (2R2)	V	V	A, B, C
	2.7pF (2R7)	V	V	A, B, C
	3.0pF (3R0)	V	V	A, B, C
	3.3pF (3R3)	V	V	A, B, C
	3.9pF (3R9)	V	V	A, B, C
	4.0pF (4R0)	V	V	A, B, C
	4.7pF (4R7)	V	V	A, B, C
	5.0pF (5R0)	V	V	A, B, C
5.6pF (5R6)	V	V	B, C, D	
6.0pF (6R0)	V	V	B, C, D	
6.8pF (6R8)	V		B, C, D	
7.0pF (7R0)	V		B, C, D	
8.0pF (8R0)	V		B, C, D	
8.2pF (8R2)	V		B, C, D	
9.0pF (9R0)	V		B, C, D	
10pF (100)	V	V	C, D, G	
12pF (120)	V	V	J	
15pF (150)	V	V	J	
20pF (200)	V	V	J	
22pF (220)	V	V	J	

1. The letter in cell is expressed the symbol of product thickness.

7. CAPACITANCE RANGE(Con.)

DIELECTRIC		NP0								Tolerance
SIZE		0201				0402				
RATED VOLTAGE (VDC)		6.3	10	25	50	25	50	100	200	
Capacitance	0.1pF (0R1)	L	L	L	L	N	N	N	N	A, B
	0.2pF (0R2)	L	L	L	L	N	N	N	N	A, B
	0.3pF (0R3)	L	L	L	L	N	N	N	N	A, B
	0.4pF (0R4)	L	L	L	L	N	N	N	N	A, B
	0.5pF (0R5)	L	L	L	L	N	N	N	N	A, B, C
	0.6pF (0R6)	L	L	L	L	N	N	N	N	A, B, C
	0.7pF (0R7)	L	L	L	L	N	N	N	N	A, B, C
	0.75pF (R75)	L	L	L	L	N	N	N	N	A, B, C
	0.8pF (0R8)	L	L	L	L	N	N	N	N	A, B, C
	0.9pF (0R9)	L	L	L	L	N	N	N	N	A, B, C
	1.0pF (1R0)	L	L	L	L	N	N	N	N	A, B, C
	1.1pF (1R1)	L	L	L	L	N	N	N	N	A, B, C
	1.2pF (1R2)	L	L	L	L	N	N	N	N	A, B, C
	1.3pF (1R3)	L	L	L	L	N	N	N	N	A, B, C
	1.4pF (1R4)	L	L	L	L	N	N	N	N	A, B, C
	1.5pF (1R5)	L	L	L	L	N	N	N	N	A, B, C
	1.6pF (1R6)	L	L	L	L	N	N	N	N	A, B, C
	1.7pF (1R7)	L	L	L	L	N	N	N	N	A, B, C
	1.8pF (1R8)	L	L	L	L	N	N	N	N	A, B, C
	1.9pF (1R9)	L	L	L	L	N	N	N	N	A, B, C
	2.0pF (2R0)	L	L	L	L	N	N	N	N	A, B, C
	2.1pF (2R1)	L	L	L	L	N	N	N	N	A, B, C
	2.2pF (2R2)	L	L	L	L	N	N	N	N	A, B, C
	2.3pF (2R3)	L	L	L	L	N	N	N	N	A, B, C
	2.4pF (2R4)	L	L	L	L	N	N	N	N	A, B, C
	2.5pF (2R5)	L	L	L	L	N	N	N	N	A, B, C
	2.6pF (2R6)	L	L	L	L	N	N	N	N	A, B, C
	2.7pF (2R7)	L	L	L	L	N	N	N	N	A, B, C
	2.8pF (2R8)	L	L	L	L	N	N	N	N	A, B, C
	2.9pF (2R9)	L	L	L	L	N	N	N	N	A, B, C
	3.0pF (3R0)	L	L	L	L	N	N	N	N	A, B, C
	3.1pF (3R1)	L	L	L	L	N	N	N	N	A, B, C
	3.2pF (3R2)	L	L	L	L	N	N	N	N	A, B, C
	3.3pF (3R3)	L	L	L	L	N	N	N	N	A, B, C
	3.4pF (3R4)	L	L	L	L	N	N	N	N	A, B, C
	3.5pF (3R5)	L	L	L	L	N	N	N	N	A, B, C
3.6pF (3R6)	L	L	L	L	N	N	N	N	A, B, C	
3.7pF (3R7)	L	L	L	L	N	N	N	N	A, B, C	
3.8pF (3R8)	L	L	L	L	N	N	N	N	A, B, C	
3.9pF (3R9)	L	L	L	L	N	N	N	N	A, B, C	
4.0pF (4R0)	L	L	L	L	N	N	N	N	A, B, C	
4.1pF (4R1)	L	L	L	L	N	N	N	N	A, B, C	
4.2pF (4R2)	L	L	L	L	N	N	N	N	A, B, C	
4.3pF (4R3)	L	L	L	L	N	N	N	N	A, B, C	
4.4pF (4R4)	L	L	L	L	N	N	N	N	A, B, C	
4.5pF (4R5)	L	L	L	L	N	N	N	N	A, B, C	
4.6pF (4R6)	L	L	L	L	N	N	N	N	A, B, C	
4.7pF (4R7)	L	L	L	L	N	N	N	N	A, B, C	
4.8pF (4R8)	L	L	L	L	N	N	N	N	A, B, C	
4.9pF (4R9)	L	L	L	L	N	N	N	N	A, B, C	
5.0pF (5R0)	L	L	L	L	N	N	N	N	A, B, C	
5.1pF (5R1)	L	L	L	L	N	N	N	N	B, C, D	
5.2pF (5R2)	L	L	L	L	N	N	N	N	B, C, D	
5.3pF (5R3)	L	L	L	L	N	N	N	N	B, C, D	
5.4pF (5R4)	L	L	L	L	N	N	N	N	B, C, D	
5.5pF (5R5)	L	L	L	L	N	N	N	N	B, C, D	
5.6pF (5R6)	L	L	L	L	N	N	N	N	B, C, D	
5.7pF (5R7)	L	L	L	L	N	N	N	N	B, C, D	
5.8pF (5R8)	L	L	L	L	N	N	N	N	B, C, D	
5.9pF (5R9)	L	L	L	L	N	N	N	N	B, C, D	
6.0pF (6R0)	L	L	L	L	N	N	N	N	B, C, D	

1. The letter in cell is expressed the symbol of product thickness.

7. CAPACITANCE RANGE(Con.)

DIELECTRIC		NPO								Tolerance
SIZE		0201				0402				
RATED VOLTAGE (VDC)		6.3	10	25	50	25	50	100	200	
Capacitance	6.1pF (6R1)	L	L	L	L	N	N	N	N	B, C, D
	6.2pF (6R2)	L	L	L	L	N	N	N	N	B, C, D
	6.3pF (6R3)	L	L	L	L	N	N	N	N	B, C, D
	6.4pF (6R4)	L	L	L	L	N	N	N	N	B, C, D
	6.5pF (6R5)	L	L	L	L	N	N	N	N	B, C, D
	6.6pF (6R6)	L	L	L	L	N	N	N	N	B, C, D
	6.7pF (6R7)	L	L	L	L	N	N	N	N	B, C, D
	6.8pF (6R8)	L	L	L	L	N	N	N	N	B, C, D
	6.9pF (6R9)	L	L	L	L	N	N	N	N	B, C, D
	7.0pF (7R0)	L	L	L	L	N	N	N	N	B, C, D
	7.1pF (7R1)	L	L	L	L	N	N	N	N	B, C, D
	7.2pF (7R2)	L	L	L	L	N	N	N	N	B, C, D
	7.3pF (7R3)	L	L	L	L	N	N	N	N	B, C, D
	7.4pF (7R4)	L	L	L	L	N	N	N	N	B, C, D
	7.5pF (7R5)	L	L	L	L	N	N	N	N	B, C, D
	7.6pF (7R6)	L	L	L	L	N	N	N	N	B, C, D
	7.7pF (7R7)	L	L	L	L	N	N	N	N	B, C, D
	7.8pF (7R8)	L	L	L	L	N	N	N	N	B, C, D
	7.9pF (7R9)	L	L	L	L	N	N	N	N	B, C, D
	8.0pF (8R0)	L	L	L	L	N	N	N	N	B, C, D
	8.1pF (8R1)	L	L	L	L	N	N	N	N	B, C, D
	8.2pF (8R2)	L	L	L	L	N	N	N	N	B, C, D
	8.3pF (8R3)	L	L	L	L	N	N	N	N	B, C, D
	8.4pF (8R4)	L	L	L	L	N	N	N	N	B, C, D
	8.5pF (8R5)	L	L	L	L	N	N	N	N	B, C, D
	8.6pF (8R6)	L	L	L	L	N	N	N	N	B, C, D
	8.7pF (8R7)	L	L	L	L	N	N	N	N	B, C, D
	8.8pF (8R8)	L	L	L	L	N	N	N	N	B, C, D
	8.9pF (8R9)	L	L	L	L	N	N	N	N	B, C, D
	9.0pF (9R0)	L	L	L	L	N	N	N	N	B, C, D
	9.1pF (9R1)	L	L	L	L	N	N	N	N	B, C, D
	9.2pF (9R2)	L	L	L	L	N	N	N	N	B, C, D
	9.3pF (9R3)	L	L	L	L	N	N	N	N	B, C, D
	9.4pF (9R4)	L	L	L	L	N	N	N	N	B, C, D
	9.5pF (9R5)	L	L	L	L	N	N	N	N	B, C, D
	9.6pF (9R6)	L	L	L	L	N	N	N	N	B, C, D
	9.7pF (9R7)	L	L	L	L	N	N	N	N	B, C, D
	9.8pF (9R8)	L	L	L	L	N	N	N	N	B, C, D
	9.9pF (9R9)	L	L	L	L	N	N	N	N	B, C, D
	10pF (100)	L	L	L	L	N	N	N	N	F, G, J
11pF (110)	L	L	L	L	N	N	N	N	F, G, J	
12pF (120)	L	L	L	L	N	N	N	N	F, G, J	
13pF (130)	L	L	L	L	N	N	N	N	F, G, J	
15pF (150)	L	L	L	L	N	N	N	N	F, G, J	
16pF (160)	L	L	L	L	N	N	N	N	F, G, J	
18pF (180)	L	L	L	L	N	N	N	N	F, G, J	
20pF (200)	L	L	L	L	N	N	N	N	F, G, J	
22pF (220)	L	L	L	L	N	N	N	N	F, G, J	
24pF (240)	L	L	L	L	N	N	N	N	F, G, J	
27pF (270)	L	L	L	L	N	N	N	N	F, G, J	
30pF (300)	L	L	L	L	N	N	N	N	F, G, J	
33pF (330)	L	L	L	L	N	N	N	N	F, G, J	
36pF (360)					N	N	N		F, G, J	
39pF (390)					N	N	N		F, G, J	
43pF (430)					N	N	N		F, G, J	
47pF (470)					N	N	N		F, G, J	
56pF (560)					N	N	N		F, G, J	
68pF (680)					N	N			F, G, J	
82pF (820)					N	N			F, G, J	
100pF (101)					N	N			F, G, J	

1. The letter in cell is expressed the symbol of product thickness.

7. CAPACITANCE RANGE(Con.)

DIELECTRIC		NPO										Tolerance
SIZE		0505			0603			0805				
RATED VOLTAGE (VDC)		50	100	250	50	100	250	50	100	250	500	
Capacitance	0.1pF (0R1)				H	H	H					A, B
	0.2pF (0R2)				H	H	H	A	A	A	A	A, B
	0.3pF (0R3)				S	S	S	T	T	T	T	A, B
	0.4pF (0R4)	J	J	J	S	S	S	T	T	T	T	A, B
	0.5pF (0R5)	J	J	J	S	S	S	T	T	T	T	A, B, C
	0.6pF (0R6)	J	J	J	S	S	S	T	T	T	T	A, B, C
	0.7pF (0R7)	J	J	J	S	S	S	T	T	T	T	A, B, C
	0.8pF (0R8)	J	J	J	S	S	S	T	T	T	T	A, B, C
	0.9pF (0R9)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.0pF (1R0)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.1pF (1R1)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.2pF (1R2)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.3pF (1R3)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.4pF (1R4)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.5pF (1R5)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.6pF (1R6)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.7pF (1R7)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.8pF (1R8)	J	J	J	S	S	S	T	T	T	T	A, B, C
	1.9pF (1R9)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.0pF (2R0)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.1pF (2R1)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.2pF (2R2)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.3pF (2R3)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.4pF (2R4)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.5pF (2R5)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.6pF (2R6)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.7pF (2R7)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.8pF (2R8)	J	J	J	S	S	S	T	T	T	T	A, B, C
	2.9pF (2R9)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.0pF (3R0)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.1pF (3R1)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.2pF (3R2)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.3pF (3R3)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.4pF (3R4)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.5pF (3R5)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.6pF (3R6)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.7pF (3R7)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.8pF (3R8)	J	J	J	S	S	S	T	T	T	T	A, B, C
	3.9pF (3R9)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.0pF (4R0)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.1pF (4R1)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.2pF (4R2)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.3pF (4R3)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.4pF (4R4)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.5pF (4R5)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.6pF (4R6)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.7pF (4R7)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.8pF (4R8)	J	J	J	S	S	S	T	T	T	T	A, B, C
	4.9pF (4R9)	J	J	J	S	S	S	T	T	T	T	A, B, C
	5.0pF (5R0)	J	J	J	S	S	S	T	T	T	T	A, B, C
	5.1pF (5R1)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.2pF (5R2)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.3pF (5R3)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.4pF (5R4)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.5pF (5R5)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.6pF (5R6)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.7pF (5R7)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.8pF (5R8)	J	J	J	S	S	S	T	T	T	T	B, C, D
	5.9pF (5R9)	J	J	J	S	S	S	T	T	T	T	B, C, D
	6.0pF (6R0)	J	J	J	S	S	S	T	T	T	T	B, C, D

1. The letter in cell is expressed the symbol of product thickness.

7. CAPACITANCE RANGE(Con.)

DIELECTRIC		NPO											Tolerance
SIZE		0505			0603				0805				
RATED VOLTAGE (VDC)		50	100	250	25	50	100	250	50	100	250	500	
Capacitance	6.1pF (6R1)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.2pF (6R2)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.3pF (6R3)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.4pF (6R4)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.5pF (6R5)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.6pF (6R6)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.7pF (6R7)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.8pF (6R8)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	6.9pF (6R9)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.0pF (7R0)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.1pF (7R1)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.2pF (7R2)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.3pF (7R3)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.4pF (7R4)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.5pF (7R5)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.6pF (7R6)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.7pF (7R7)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.8pF (7R8)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	7.9pF (7R9)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.0pF (8R0)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.1pF (8R1)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.2pF (8R2)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.3pF (8R3)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.4pF (8R4)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.5pF (8R5)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.6pF (8R6)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.7pF (8R7)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.8pF (8R8)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	8.9pF (8R9)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.0pF (9R0)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.1pF (9R1)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.2pF (9R2)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.3pF (9R3)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.4pF (9R4)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.5pF (9R5)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.6pF (9R6)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.7pF (9R7)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.8pF (9R8)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	9.9pF (9R9)	J	J	J	S	S	S	S	T	T	T	T	B, C, D
	10pF (100)	J	J	J	S	S	S	S	T	T	T	T	F, G, J
	11pF (110)	J	J	J	S	S	S	S	T	T	T	T	F, G, J
	12pF (120)	J	J	J	S	S	S	S	T	T	T	T	F, G, J
13pF (130)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
15pF (150)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
16pF (160)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
18pF (180)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
20pF (200)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
22pF (220)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
24pF (240)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
27pF (270)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
30pF (300)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
33pF (330)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
36pF (360)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
39pF (390)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
43pF (430)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
47pF (470)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
56pF (560)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
68pF (680)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
82pF (820)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
100pF (101)	J	J	J	S	S	S	S	T	T	T	T	F, G, J	
120pF (121)				S	S			T	T	T		F, G, J	
150pF (151)				S	S			T	T	T		F, G, J	
180pF (181)				S	S			T	T	T		F, G, J	
220pF (221)				S	S			T	T	T		F, G, J	

1. The letter in cell is expressed the symbol of product thickness.

7. CAPACITANCE RANGE(Con.)

DIELECTRIC		NPO						Tolerance
SIZE		1111						
RATED VOLTAGE (VDC)		50	100	200	250	500	1500	
Capacitance	1.0pF (1R0)	G	G	G	G	G	G	A, B, C
	1.1pF (1R1)	G	G	G	G	G	G	A, B, C
	1.2pF (1R2)	G	G	G	G	G	G	A, B, C
	1.3pF (1R3)	G	G	G	G	G	G	A, B, C
	1.5pF (1R5)	G	G	G	G	G	G	A, B, C
	1.6pF (1R6)	G	G	G	G	G	G	A, B, C
	1.8pF (1R8)	G	G	G	G	G	G	A, B, C
	2.0pF (2R0)	G	G	G	G	G	G	A, B, C
	2.2pF (2R2)	G	G	G	G	G	G	A, B, C
	2.4pF (2R4)	G	G	G	G	G	G	A, B, C
	2.7pF (2R7)	G	G	G	G	G	G	A, B, C
	3.0pF (3R0)	G	G	G	G	G	G	A, B, C
	3.3pF (3R3)	G	G	G	G	G	G	A, B, C
	3.6pF (3R6)	G	G	G	G	G	G	A, B, C
	3.9pF (3R9)	G	G	G	G	G	G	A, B, C
	4.0pF (4R0)	G	G	G	G	G	G	A, B, C
	4.3pF (4R3)	G	G	G	G	G	G	A, B, C
	5.0pF (5R0)	G	G	G	G	G	G	A, B, C
	5.1pF (5R1)	G	G	G	G	G	G	B, C, D
	5.6pF (5R6)	G	G	G	G	G	G	B, C, D
	6.0pF (6R0)	G	G	G	G	G	G	B, C, D
	6.8pF (6R8)	G	G	G	G	G	G	B, C, D
	7.0pF (7R0)	G	G	G	G	G	G	B, C, D
	8.0pF (8R0)	G	G	G	G	G	G	B, C, D
	8.2pF (8R2)	G	G	G	G	G	G	B, C, D
	10pF (100)	G	G	G	G	G	G	F, G, J
	12pF (120)	G	G	G	G	G	G	F, G, J
	15pF (150)	G	G	G	G	G	G	F, G, J
	18pF (180)	G	G	G	G	G	G	F, G, J
	22pF (220)	G	G	G	G	G	G	F, G, J
	27pF (270)	G	G	G	G	G	G	F, G, J
	33pF (330)	G	G	G	G	G	G	F, G, J
	39pF (390)	G	G	G	G	G	G	F, G, J
	47pF (470)	G	G	G	G	G	G	F, G, J
	56pF (560)	G	G	G	G	G	G	F, G, J
	68pF (680)	G	G	G	G	G	G	F, G, J
	82pF (820)	G	G	G	G	G	G	F, G, J
	100pF (101)	G	G	G	G	G	G	F, G, J
	120pF (121)	G	G	G	G	G	G	F, G, J
	150pF (151)	G	G	G	G	G	G	F, G, J
180pF (181)	G	G	G	G	G	G	F, G, J	
220pF (221)	G	G	G	G	G	G	F, G, J	
270pF (271)	G	G	G	G	G	G	F, G, J	
330pF (331)	G	G	G	G	G	G	F, G, J	
390pF (391)	G	G	G	G	G	G	F, G, J	
470pF (471)	G	G	G	G	G	G	F, G, J	
560pF (561)	G	G	G	G	G	G	F, G, J	
680pF (681)	G	G	G	G	G	G	F, G, J	
820pF (821)	G	G	G	G	G	G	F, G, J	
1000pF (102)	G	G	G	G	G	G	F, G, J	

1. The letter in cell is expressed the symbol of product thickness.




7. CAPACITANCE RANGE(Con.)(X8G)

DIELECTRIC	X8G					Tolerance
	SIZE	0402	0603	0805		
	RATED VOLTAGE (VDC)	200	250	250	500	
Capacitance	0.1pF	N		A	A	A, B
	0.2pF	N		A	A	A, B
	0.3pF	N	S	T	T	A, B
	0.4pF	N	S	T	T	A, B
	0.5pF	N	S	T	T	A, B, C
	0.6pF	N	S	T	T	A, B, C
	0.7pF	N	S	T	T	A, B, C
	0.8pF	N	S	T	T	A, B, C
	0.9pF	N	S	T	T	A, B, C
	1.0pF	N	S	T	T	A, B, C
	1.1pF	N	S	T	T	A, B, C
	1.2pF	N	S	T	T	A, B, C
	1.3pF	N	S	T	T	A, B, C
	1.4pF	N	S	T	T	A, B, C
	1.5pF	N	S	T	T	A, B, C
	1.6pF	N	S	T	T	A, B, C
	1.7pF	N	S	T	T	A, B, C
	1.8pF	N	S	T	T	A, B, C
	1.9pF	N	S	T	T	A, B, C
	2.0pF	N	S	T	T	A, B, C
	2.1pF	N	S	T	T	A, B, C
	2.2pF	N	S	T	T	A, B, C
	2.3pF	N	S	T	T	A, B, C
	2.4pF	N	S	T	T	A, B, C
	2.5pF	N	S	T	T	A, B, C
	2.6pF	N	S	T	T	A, B, C
	2.7pF	N	S	T	T	A, B, C
	2.8pF	N	S	T	T	A, B, C
	2.9pF	N	S	T	T	A, B, C
	3.0pF	N	S	T	T	A, B, C
	3.1pF	N	S	T	T	A, B, C
	3.2pF	N	S	T	T	A, B, C
	3.3pF	N	S	T	T	A, B, C
	3.4pF	N	S	T	T	A, B, C
	3.5pF	N	S	T	T	A, B, C
	3.6pF	N	S	T	T	A, B, C
	3.7pF	N	S	T	T	A, B, C
	3.8pF	N	S	T	T	A, B, C
	3.9pF	N	S	T	T	A, B, C
	4.0pF	N	S	T	T	A, B, C
	4.1pF	N	S	T	T	A, B, C
	4.2pF	N	S	T	T	A, B, C
	4.3pF	N	S	T	T	A, B, C
	4.4pF	N	S	T	T	A, B, C
	4.5pF	N	S	T	T	A, B, C
	4.6pF	N	S	T	T	A, B, C
	4.7pF	N	S	T	T	A, B, C
	4.8pF	N	S	T	T	A, B, C
	4.9pF	N	S	T	T	A, B, C
	5.0pF	N	S	T	T	A, B, C
	5.1pF	N	S	T	T	B, C, D
	5.2pF	N	S	T	T	B, C, D
	5.3pF	N	S	T	T	B, C, D
	5.4pF	N	S	T	T	B, C, D
	5.5pF	N	S	T	T	B, C, D
	5.6pF	N	S	T	T	B, C, D
	5.7pF	N	S	T	T	B, C, D
	5.8pF	N	S	T	T	B, C, D
	5.9pF	N	S	T	T	B, C, D
	6.0pF	N	S	T	T	B, C, D







DIELECTRIC	X8G					Tolerance
	SIZE	0402	0603	0805		
	RATED VOLTAGE (VDC)	200	250	250	500	
Capacitance	6.1pF (6R1)	N	S	T	T	B, C, D
	6.2pF (6R2)	N	S	T	T	B, C, D
	6.3pF (6R3)	N	S	T	T	B, C, D
	6.4pF (6R4)	N	S	T	T	B, C, D
	6.5pF (6R5)	N	S	T	T	B, C, D
	6.6pF (6R6)	N	S	T	T	B, C, D
	6.7pF (6R7)	N	S	T	T	B, C, D
	6.8pF (6R8)	N	S	T	T	B, C, D
	6.9pF (6R9)	N	S	T	T	B, C, D
	7.0pF (7R0)	N	S	T	T	B, C, D
	7.1pF (7R1)	N	S	T	T	B, C, D
	7.2pF (7R2)	N	S	T	T	B, C, D
	7.3pF (7R3)	N	S	T	T	B, C, D
	7.4pF (7R4)	N	S	T	T	B, C, D
	7.5pF (7R5)	N	S	T	T	B, C, D
	7.6pF (7R6)	N	S	T	T	B, C, D
	7.7pF (7R7)	N	S	T	T	B, C, D
	7.8pF (7R8)	N	S	T	T	B, C, D
	7.9pF (7R9)	N	S	T	T	B, C, D
	8.0pF (8R0)	N	S	T	T	B, C, D
	8.1pF (8R1)	N	S	T	T	B, C, D
	8.2pF (8R2)	N	S	T	T	B, C, D
	8.3pF (8R3)	N	S	T	T	B, C, D
	8.4pF (8R4)	N	S	T	T	B, C, D
	8.5pF (8R5)	N	S	T	T	B, C, D
	8.6pF (8R6)	N	S	T	T	B, C, D
	8.7pF (8R7)	N	S	T	T	B, C, D
	8.8pF (8R8)	N	S	T	T	B, C, D
	8.9pF (8R9)	N	S	T	T	B, C, D
	9.0pF (9R0)	N	S	T	T	B, C, D
	9.1pF (9R1)	N	S	T	T	B, C, D
	9.2pF (9R2)	N	S	T	T	B, C, D
	9.3pF (9R3)	N	S	T	T	B, C, D
	9.4pF (9R4)	N	S	T	T	B, C, D
	9.5pF (9R5)	N	S	T	T	B, C, D
	9.6pF (9R6)	N	S	T	T	B, C, D
	9.7pF (9R7)	N	S	T	T	B, C, D
	9.8pF (9R8)	N	S	T	T	B, C, D
	9.9pF (9R9)	N	S	T	T	B, C, D
	10pF (100)	N	S	T	T	F, G, J
	11pF (110)	N	S	T	T	F, G, J
	12pF (120)	N	S	T	T	F, G, J
	13pF (130)	N	S	T	T	F, G, J
	15pF (150)	N	S	T	T	F, G, J
	16pF (160)	N	S	T	T	F, G, J
	18pF (180)	N	S	T	T	F, G, J
	20pF (200)	N	S	T	T	F, G, J
	22pF (220)	N	S	T	T	F, G, J
	24pF (240)	N	S	T		F, G, J
	27pF (270)	N	S	T		F, G, J
	30pF (300)	N	S	T		F, G, J
	33pF (330)	N	S	T		F, G, J
	36pF (360)		S	T		F, G, J
	39pF (390)		S	T		F, G, J
	43pF (430)		S	T		F, G, J
	47pF (470)			T		F, G, J
	56pF (560)			T		F, G, J
	68pF (680)			T		F, G, J
	82pF (820)			T		F, G, J

1. The letter in cell is expressed the symbol of product thickness.







8. ELECTRICAL CHARACTERISTICS

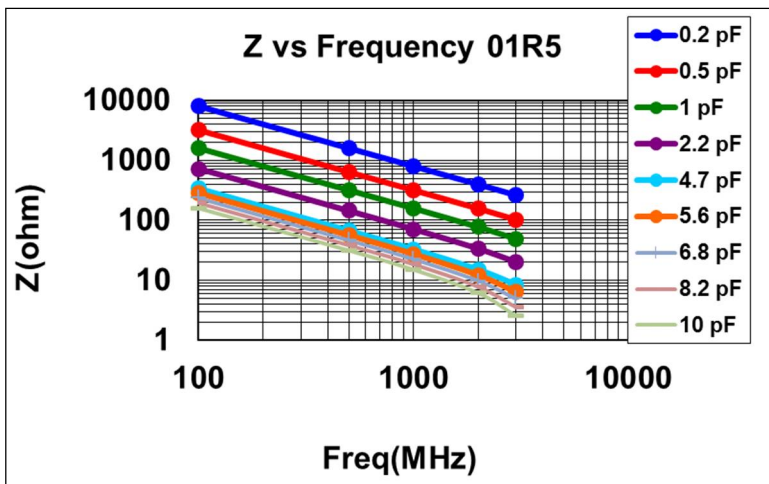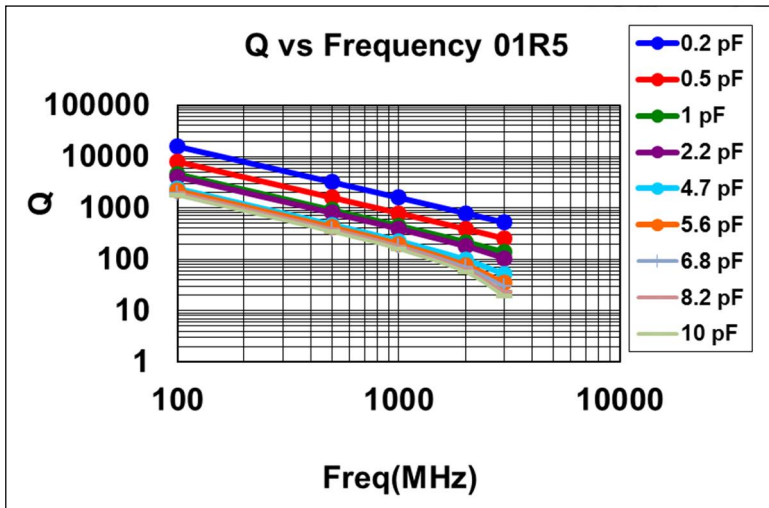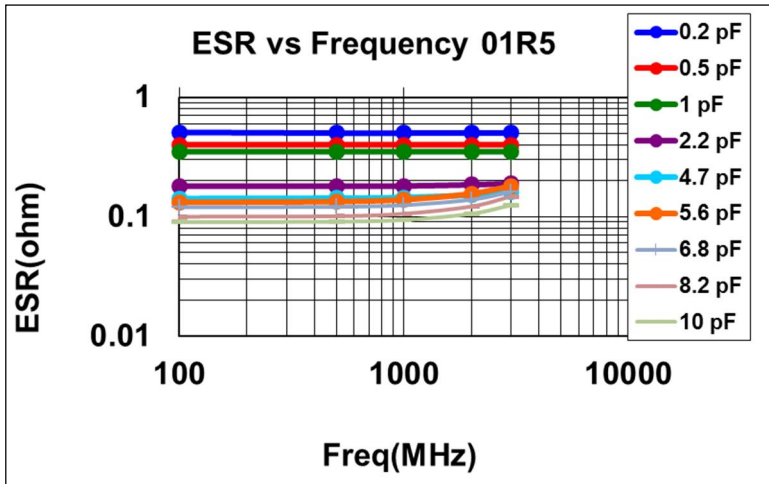

8. ELECTRICAL CHARACTERISTICS

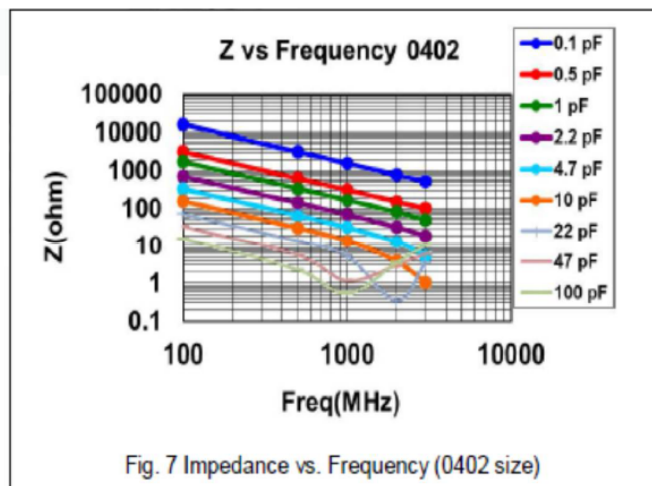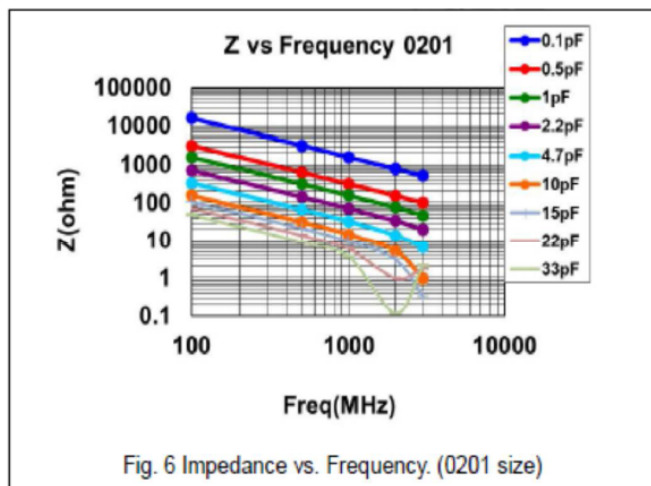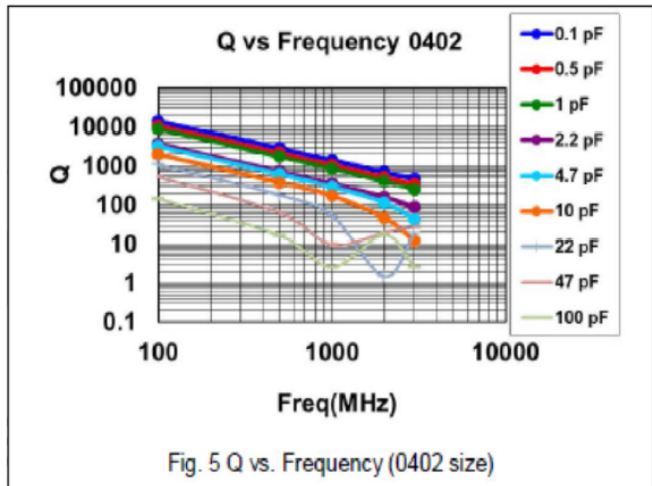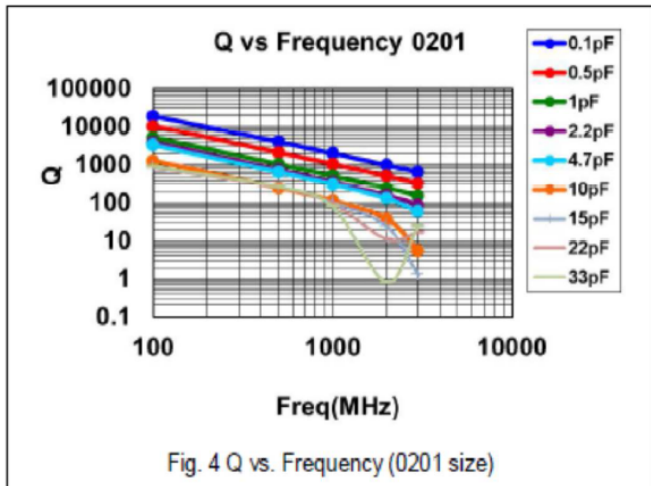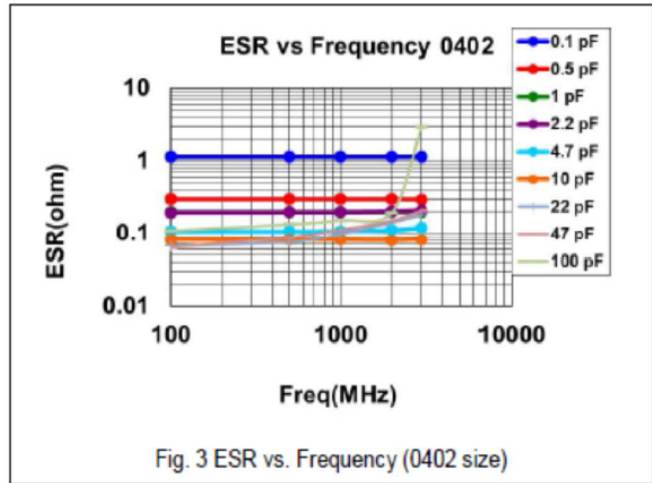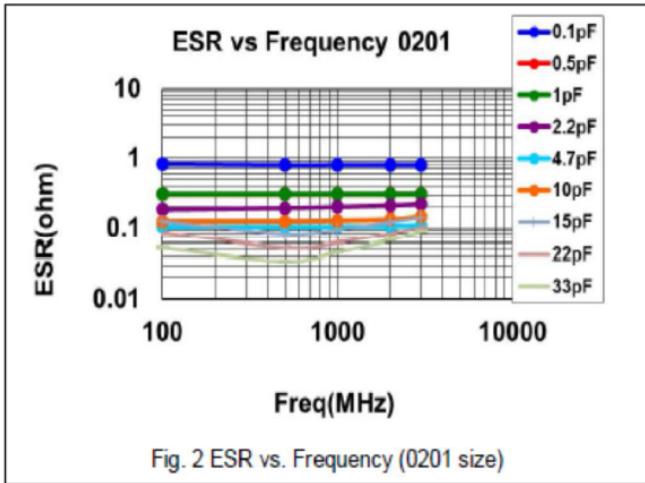

8. ELECTRICAL CHARACTERISTICS

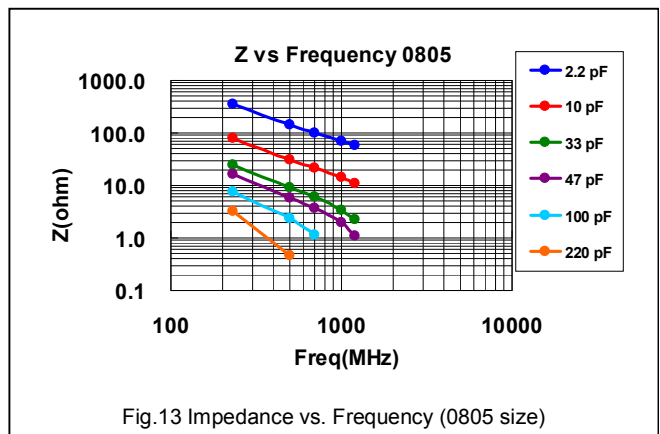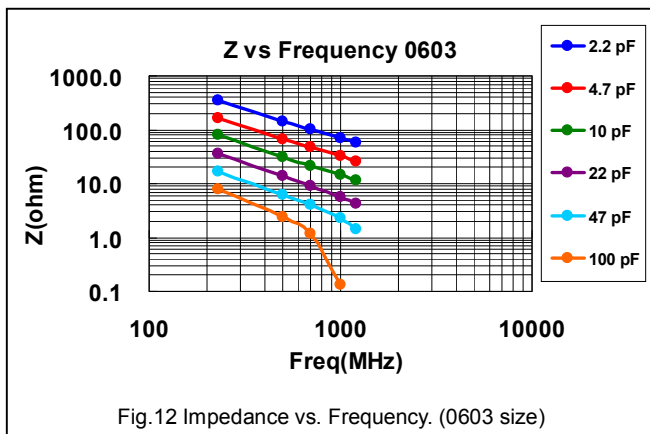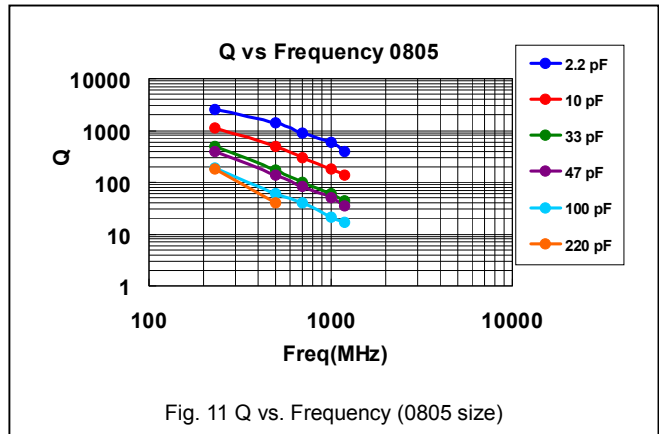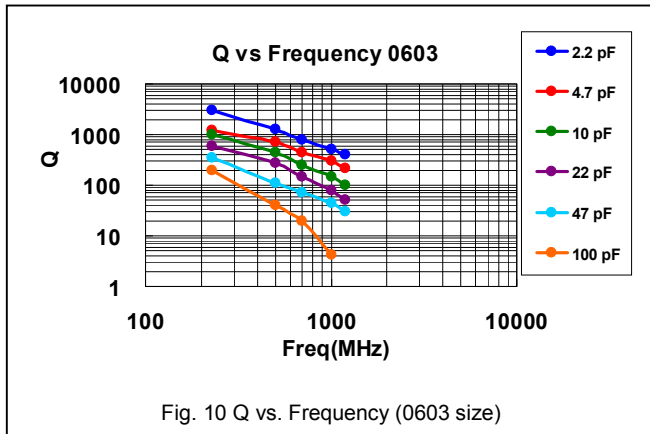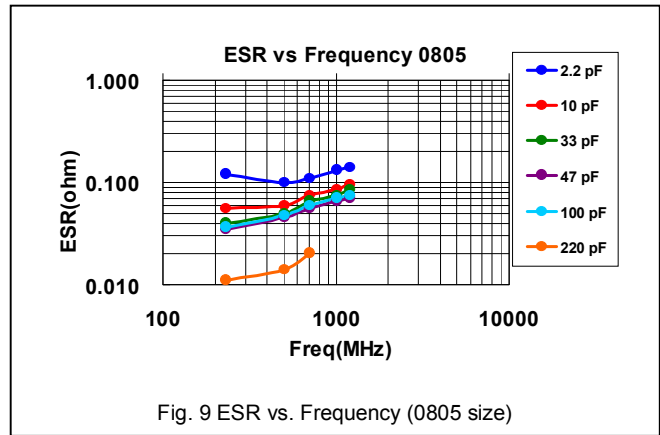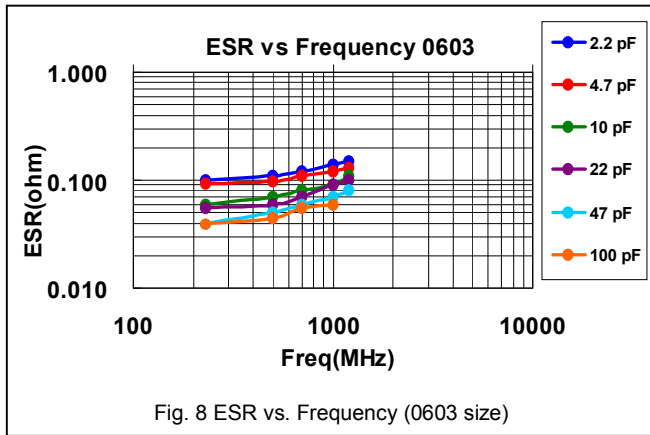

8. ELECTRICAL CHARACTERISTICS

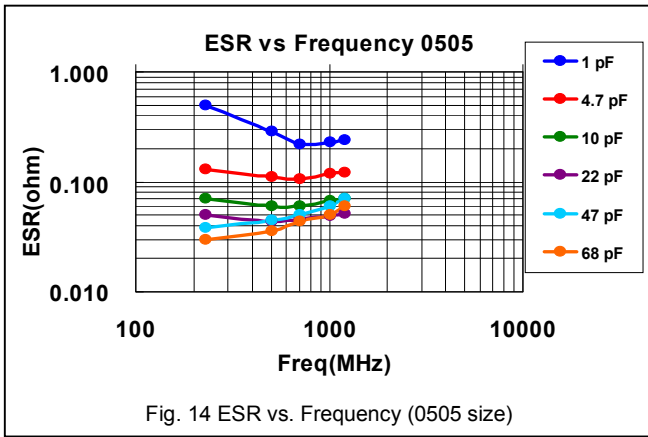


Fig. 14 ESR vs. Frequency (0505 size)

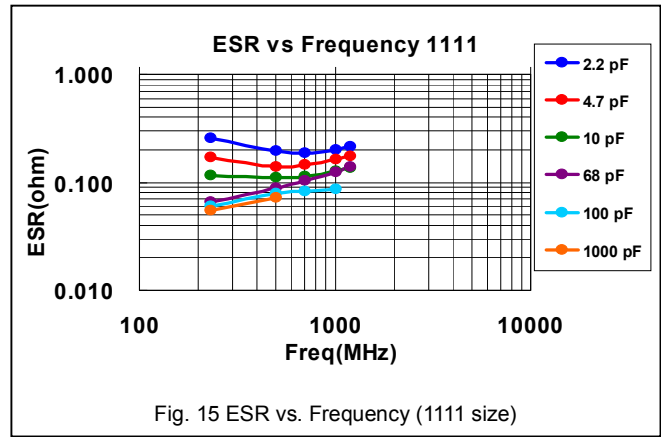


Fig. 15 ESR vs. Frequency (1111 size)

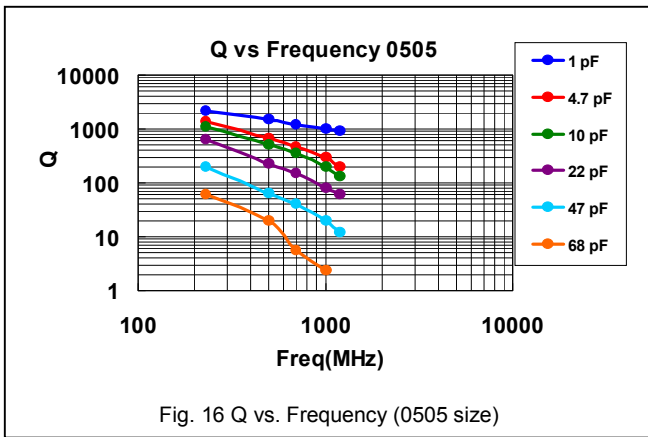


Fig. 16 Q vs. Frequency (0505 size)

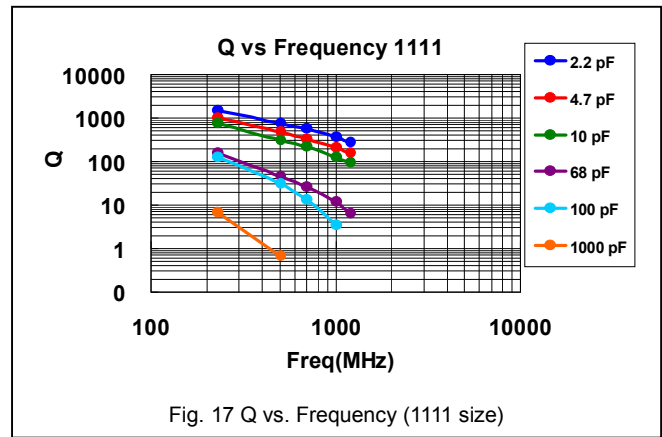


Fig. 17 Q vs. Frequency (1111 size)

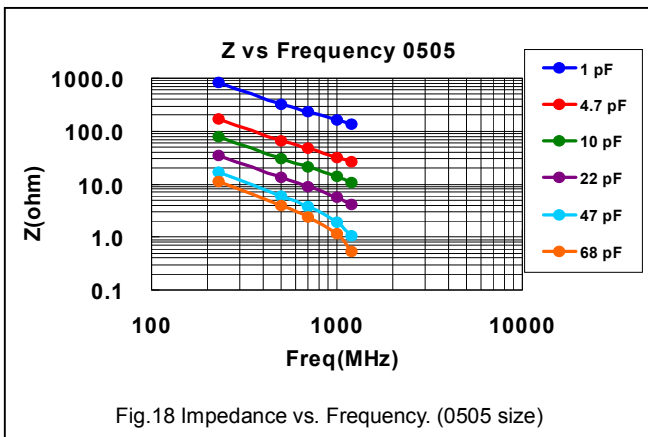


Fig.18 Impedance vs. Frequency. (0505 size)

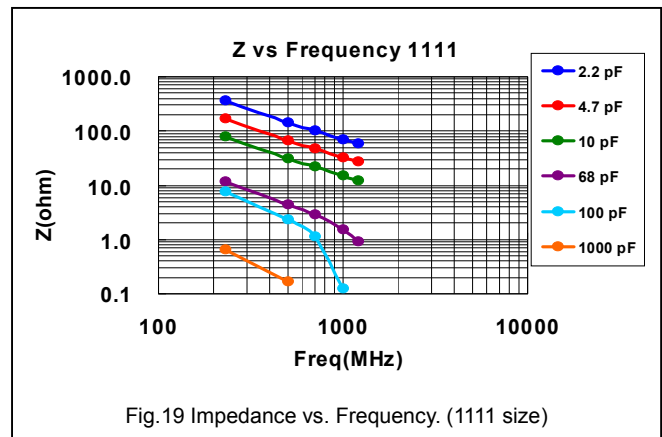


Fig.19 Impedance vs. Frequency. (1111 size)

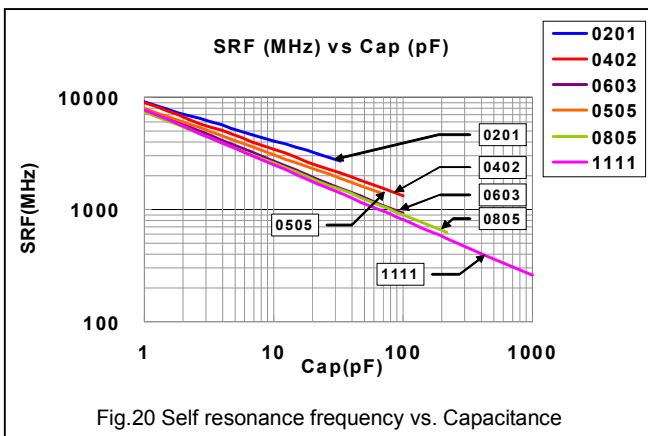


Fig.20 Self resonance frequency vs. Capacitance

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No	Item	Test Condition	Requirements															
1.	Visual and Dimensions	---	* No remarkable defect. * Dimensions to confirm to individual specification sheet.															
2.	Capacitance		* Shall not exceed the limits given in the detailed spec.															
3.	Q/D.F. (Dissipation Factor)	* Class I : (NP0) Cap. ≤1000pF, 1.0±0.2Vrms, 1MHz±10%. Cap. >1000pF, 1.0±0.2Vrms, 1KHz±10%. At 25°C ambient temperature.	* 01005, 0201, 0402/25V~50V : Cap. <30pF, Q≥400+20C; Cap. ≥30pF, Q≥1000 * 0402/100V~200V, 0603, 0805, 0505, 1111 : Cap. <30pF : Q≥800+20C; Cap. ≥30pF : Q≥1400															
4.	Temperature Coefficient	* With no electrical load. <table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp.</th> </tr> </thead> <tbody> <tr> <td>NP0</td> <td>-55~125°C at 25°C</td> </tr> <tr> <td>X8G</td> <td>-55~150°C at 25°C</td> </tr> </tbody> </table>	T.C.	Operating Temp.	NP0	-55~125°C at 25°C	X8G	-55~150°C at 25°C	* Capacitance change: within ±30ppm/°C;									
T.C.	Operating Temp.																	
NP0	-55~125°C at 25°C																	
X8G	-55~150°C at 25°C																	
5.	Insulation Resistance	* ≤100V : To apply rated voltage for max. 120 sec. * ≥200V : To apply rated voltage (500V max.) for 60 sec.	* ≥10GΩ or RxC≥100Ω-F, whichever is smaller.															
6.	Dielectric Strength	* To apply voltage : ≤100V : 250% of rated voltage. (RF02:300% of rated voltage.) 200V ~ 300V : 200% of rated voltage. 500V ~ 999V : 150% of rated voltage. 1000V ~ 3000V : 120% of rated voltage. 4000V : 110% of rated voltage. * Duration : 1 to 5 sec. * Charge & discharge current less than 50mA.	* No evidence of damage or flash over during test.															
7.	Solderability	* Solder temperature : 235±5°C. * Dipping time : 2±0.5 sec.	* 95% min. coverage of all metalized area.															
8.	Resistance to Soldering Heat	* Solder temperature : 260±5°C. * Dipping time : 10±1 sec. * Preheating : 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap. change : Within ±2.5% or ±0.25pF whichever is larger. * Q/D.F., I.R. and dielectric strength : To meet initial requirements. * 25% max. leaching on each edge.															
9.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table border="1"> <thead> <tr> <th>Step</th> <th>Temp.(°C)</th> <th>Time(min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </tbody> </table> * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	Step	Temp.(°C)	Time(min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3	* No remarkable damage. * Cap. change : Within ±2.5% or ±0.25pF, whichever is larger. * Q/D.F., I.R. and dielectric strength : To meet initial requirements.
Step	Temp.(°C)	Time(min.)																
1	Min. operating temp. +0/-3	30±3																
2	Room temp.	2~3																
3	Max. operating temp. +3/-0	30±3																
4	Room temp.	2~3																
10.	Humidity (Damp Heat) Steady State	* Test temp. : 40±2°C. * Humidity : 90~95% RH. * Test time : 500 +24/-0hrs. * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap. change : Within ±5.0% or ±0.5pF, whichever is larger. * Q/D.F. value : Cap. >30pF, Q≥350. 10pF≤Cap.≤30pF, Q≥275+2.5C. Cap. <10pF, Q≥200+10C. * I.R. : ≥1GΩ.															

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																												
11.	Humidity (Damp Heat) Load	* Test temp. : 40±2°C. * Humidity : 90~95%RH. * Test time : 500 +24/-0hrs. * To apply voltage : Rated voltage (500Vdc max.). * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap. change : Within ±7.5% or ±0.75pF, whichever is larger. * Q/D.F. value : Cap.≥30pF, Q≥200; Cap.<30pF, Q≥100+10/3C. * I.R. : ≥500MΩ.																												
12.	High Temperature Load (Endurance)	* Test temp. : NP0: 125±3°C X8G: 150±3°C. * To apply voltage : (1) 10V≤Ur<500V : 200% of rated voltage. (2) ≤6.3V or 500V : 150% of rated voltage. (3) Ur≥630V : 120% of rated voltage. * Test time : 1000 +24/-0 hrs. * Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap. change : Within ±3.0% or ±0.3pF, whichever is larger. * Q/D.F. value : Cap.>30pF, Q≥350. 10pF≤Cap.≤30pF, Q≥275+2.5C. Cap.<10pF, Q≥200+10C. * I.R. : ≥1GΩ.																												
13.	Adhesive Strength of Termination	* Pressurizing force : 01005 : 1N / 0201 : 2N. 0402 to 0603 : 5N / >0603 : 10N. * Test time : 10±1 sec.	* No remarkable damage or removal of the terminations.																												
14.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: within ±5.0% or ±0.5pF whichever is larger. (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test)																												
15.	Vibration Resistance	* Vibration frequency : 10~55 Hz/min. * Total amplitude : 1.5mm. * Test time : 6 hrs. (Two hrs each in three mutually perpendicular directions) * Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24±2 hrs at room temp.	* No remarkable damage. * Cap. change and D.F. : To meet initial spec.																												
16.	ESR	* The ESR should be measured at room temperature and tested at frequency 1±0.1 GHz.	<table border="1"> <thead> <tr> <th>01005</th> <th>0505</th> </tr> </thead> <tbody> <tr> <td>0.2pF≤Cap.≤1pF : <700mΩ/pF</td> <td>0.4pF≤Cap.<1.0pF : <1500mΩ</td> </tr> <tr> <td>1pF<Cap.≤2pF : <600mΩ</td> <td>1.0pF≤Cap.<10pF : <250mΩ</td> </tr> <tr> <td>2pF<Cap.≤5pF : <500mΩ</td> <td>10pF≤Cap.≤100pF : <200mΩ</td> </tr> <tr> <td>5pF<Cap.≤10pF : <300mΩ</td> <td></td> </tr> <tr> <td>10pF<Cap.≤22pF : <350mΩ</td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>0201</th> <th>0402</th> </tr> </thead> <tbody> <tr> <td>0.1pF≤Cap.≤1pF : <350mΩ/pF</td> <td>0.1pF≤Cap.≤1pF : <350mΩ/pF</td> </tr> <tr> <td>1pF<Cap.≤5pF : <300mΩ</td> <td>1pF<Cap.≤5pF : <300mΩ</td> </tr> <tr> <td>5pF<Cap.≤22pF : <250mΩ</td> <td>5pF<Cap.≤100pF : <250mΩ</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>0603</th> <th>0805</th> </tr> </thead> <tbody> <tr> <td>0.3pF≤Cap.≤1pF : <1500mΩ</td> <td>0.3pF≤Cap.≤1pF : <1500mΩ</td> </tr> <tr> <td>1pF<Cap.≤10pF : <250mΩ</td> <td>1pF<Cap.≤10pF : <250mΩ</td> </tr> <tr> <td>10pF<Cap.≤220pF : <200mΩ</td> <td>Cap.>10pF : <200mΩ</td> </tr> </tbody> </table>	01005	0505	0.2pF≤Cap.≤1pF : <700mΩ/pF	0.4pF≤Cap.<1.0pF : <1500mΩ	1pF<Cap.≤2pF : <600mΩ	1.0pF≤Cap.<10pF : <250mΩ	2pF<Cap.≤5pF : <500mΩ	10pF≤Cap.≤100pF : <200mΩ	5pF<Cap.≤10pF : <300mΩ		10pF<Cap.≤22pF : <350mΩ		0201	0402	0.1pF≤Cap.≤1pF : <350mΩ/pF	0.1pF≤Cap.≤1pF : <350mΩ/pF	1pF<Cap.≤5pF : <300mΩ	1pF<Cap.≤5pF : <300mΩ	5pF<Cap.≤22pF : <250mΩ	5pF<Cap.≤100pF : <250mΩ	0603	0805	0.3pF≤Cap.≤1pF : <1500mΩ	0.3pF≤Cap.≤1pF : <1500mΩ	1pF<Cap.≤10pF : <250mΩ	1pF<Cap.≤10pF : <250mΩ	10pF<Cap.≤220pF : <200mΩ	Cap.>10pF : <200mΩ
		01005	0505																												
0.2pF≤Cap.≤1pF : <700mΩ/pF	0.4pF≤Cap.<1.0pF : <1500mΩ																														
1pF<Cap.≤2pF : <600mΩ	1.0pF≤Cap.<10pF : <250mΩ																														
2pF<Cap.≤5pF : <500mΩ	10pF≤Cap.≤100pF : <200mΩ																														
5pF<Cap.≤10pF : <300mΩ																															
10pF<Cap.≤22pF : <350mΩ																															
0201	0402																														
0.1pF≤Cap.≤1pF : <350mΩ/pF	0.1pF≤Cap.≤1pF : <350mΩ/pF																														
1pF<Cap.≤5pF : <300mΩ	1pF<Cap.≤5pF : <300mΩ																														
5pF<Cap.≤22pF : <250mΩ	5pF<Cap.≤100pF : <250mΩ																														
0603	0805																														
0.3pF≤Cap.≤1pF : <1500mΩ	0.3pF≤Cap.≤1pF : <1500mΩ																														
1pF<Cap.≤10pF : <250mΩ	1pF<Cap.≤10pF : <250mΩ																														
10pF<Cap.≤220pF : <200mΩ	Cap.>10pF : <200mΩ																														
* The ESR should be measured at room temperature and tested at frequency 500±50 MHz.	0201, 22pF≤Cap≤33pF : < 300mΩ 1111, 100pF<Cap≤1000pF : < 150mΩ																														

10. PACKAGE DIMENSION AND QUANTITY



Paper Tape :

Size	Thickness (mm)/Symbol		Paper tape	
			7" reel	13" reel
01005 (0402)	0.20±0.02	V	20,000	-
0201 (0603)	0.30±0.03	L	15,000	70,000
0402 (1005)	0.50±0.05	N	10,000	50,000
0603 (1608)	0.80±0.07	S	4,000	15,000
	0.50±0.10	H	4,000	-
0805 (2012)	0.60±0.10	A	4,000	15,000
	0.85±0.10	T	4,000	15,000

Plastic Tape :

Size	Thickness (mm)/Symbol		Plastic tape	
			7" reel	13" reel
0505 (1414)	1.15±0.15	J	3,000	-
1111 (2828)	≤ 1.78	G	2,000	-

Tape & reel dimensions :

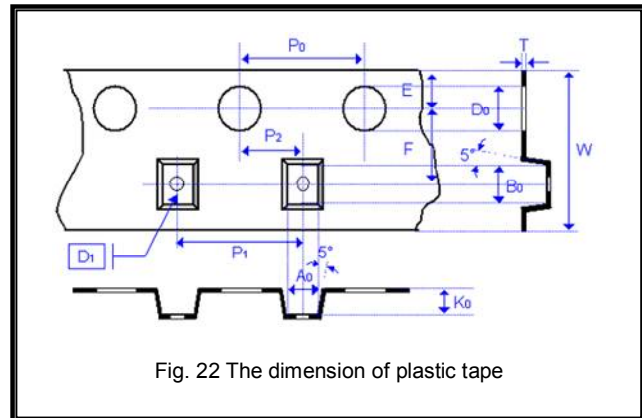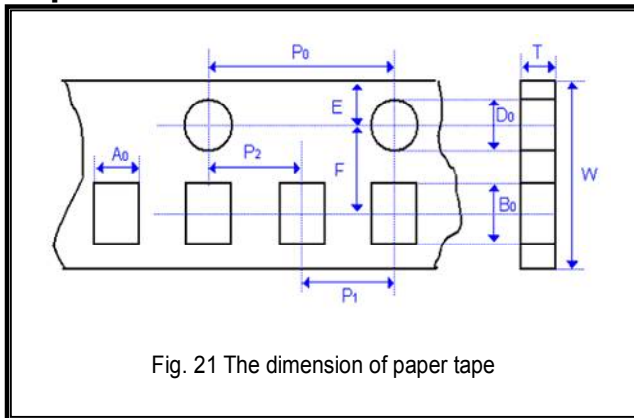

Size	01005	0201	0402	0505	0603	0805	1111
Thickness	V	L	N	J	S	T	G
A ₀	0.25±0.05	0.40±0.10	0.70±0.20	<1.90	1.05±0.30	1.50±0.20	<3.05
B ₀	0.45±0.05	0.70±0.10	1.20±0.20	<1.90	1.80±0.30	2.30±0.20	<3.80
T	≤0.50	≤0.55	≤0.80	0.23±0.10	≤1.20	≤1.20	0.23±0.10
K ₀	-	-	-	<1.50	-	-	< 2.50
W	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30	8.00±0.30
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.00±0.10	40.00±0.10	40.00±0.10	40.00±0.20	40.00±0.20	40.00±0.20	40.00±0.20
P ₁	2.00±0.05	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0	1.50+0.1/-0
D ₁	-	-	-	1.00±0.10	-	-	1.00±0.10
E	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05

10. PACKAGE DIMENSION AND QUANTITY

Paper Tape :

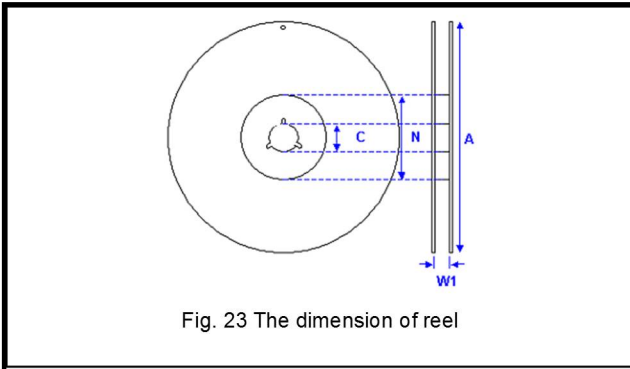


Fig. 23 The dimension of reel

Size	01005, 0201, 0402, 0505, 0603, 0805, 1111	
Reel size	7"	13"
C	13.0±0.5	13.0±0.5
W ₁	10.0±1.5	10.0±1.5
A	178.0±2.0	330.0±2.0
N	60.0+1.0/-0	50 min

11. APPENDIXES

Constructions :

No.	Name	X8G, NP0
①	Ceramic material	Hi-Q dielectric ceramic
②	Inner electrode	Cu
③	Termination	Inner layer
④		Middle layer
⑤		Outer layer
		Sn (Matt)

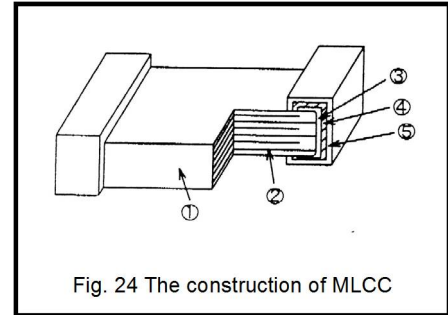


Fig. 24 The construction of MLCC

Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions; MSL Level 1.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N₂ within oven are recommended.

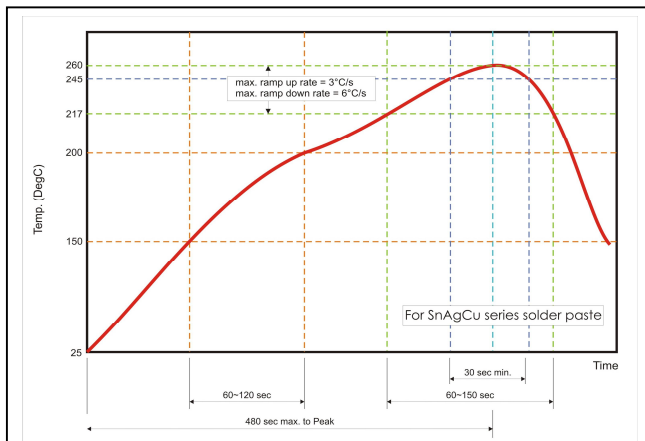


Fig. 25 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

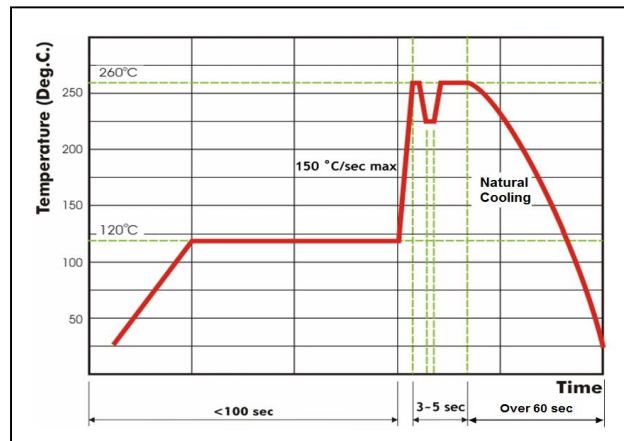


Fig. 26 Recommended wave soldering profile for SMT process with SnAgCu series solder.